


Catalogue ____ *2024*____

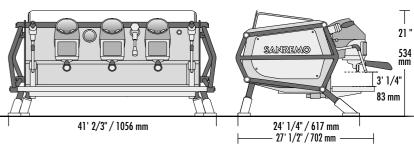

2 group CR

2 steam taps

1 water tap 1 one-cup filter hoder 2 two-cup filter hoders

34' 1/2" / 876 mm

3 group CR

2 steam taps 1 water tap

1 one-cup filter hoder

SANREMO


3 two-cup filter hoders



Technical data 2 group 3 group 220-240 1N / 380-415 3N voltage kW 6.9 / 3.58.1 / 3.5 max input boiler/steam boiler's 7.6 / 4.5 8.4 / 4.5 steam boiler capacity 0.160 external pump power 0.160 preheating boiler capacity 1.0 1.5 kW 1.0 1.5 preheating boiler resistance power kW 0.16 0.20 cup-heater power 1.0 1.5 units boiler capacity kW 1.6 2.4 units boiler resistance power net weight lb / kg 214/97 265 / 120 333 / 151 gross weight (with shipping crate) lb / kg 388 / 176

✓ MULTIBOILER SYSTEM

Sanremo Café Racer multiboiler system ensures a new level of thermal precision thanks to the 4 points of temperature PID control.

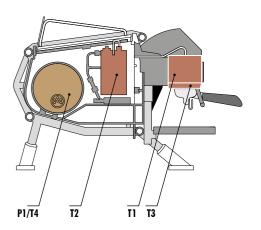



RoHS



SAVING SYSTEM

Component insulation and smart electronics for maximum energy efficiency



VOLUMETRIC PUMP PERFORMANCE The unique 300 l/h

pump guarantees constant pressure in all conditions of machine use

HIGH PERFORMANCE FLOWMETER VOLUMETRICS

For an accurate and precise coffee dose in the cup







Low additional liquid during the milk steaming



EASY SERVICE

Fast access to the internal parts for quick and easy technical service



Café Racer, born to run Link to the website



SOFT PRE-INFUSION

Flowactive System: for precise control of the water flow and pre-infusion time



Quick setting

of the individual groups



System digital display to provide visibility of all working parameters



HEART **OF STEEL**

For maximum thermal stability:

- Groups in AISI 316L, weight 17.6 lb / 8 kg each
- Portafilters AISI 316
- Boilers AISI 316

ADJUSTABLE HEIGHT WORK SURFACE

Innovative Sanremo "All in one" suspension system that allows cups of different shapes and heights (adjustable from 3' 2/4" to 5' 3/4" / from 85 to 150 mm)



Characteristics



AISI 316L STEEL GROUPS WITH 17.6 lb / 8 kg PURE STEEL

Exclusive Sanremo design ensure exceptional thermal stability and maximum resistance to oxidation and lime scale.



AISI 316 STAINLESS STEEL FILTER HODER WITH "COMPETITION FILTER"*

Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.



AISI 316L STAINLESS STEEL FREE MOTION STEAM TAPS

Flexible control system for producing and dispensing steam.



AISI 316L STAINLESS STEEL STEAM WAND "COOL TOUCH"

Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art' high-performance steam terminals.



PROGRAMMABLE ELECTRONIC PRE-INFUSION

Allows control with 0.1 second tolerance of the flow of water that wets the coffee bed, with programming of 4 different profiles for each group.



INDEPENDENT ADJUSTMENT OF THE PID INFUSION WATER

Precision setting (gradient ± 0.5 °C with measured constancy lower than 0.2°C).



SYSTEM DISPLAY

Visibility of all the machine functions: temperatures, pressures and levels.



COFFEE UNIT SINGLE DISPLAY

Control of all coffee extraction



MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS

Instantaneous mixing of fresh water and steam for a better chemical and organoleptic quality.



HIGH PERFORMANCE **VOLUMETRIC PUMP** 300 l/h ***

Pressure stability also with prolonged and contemporary use of more than one group.



HIGH PERFORMANCE FLOWMETER VOLUMETRICS

For an accurate and precise coffee dose in the cup.



STEAM CONTROL ADJUSTABLE **ELECTRONIC PRESSURE SWITCH**

Sensor with 0.02 bar precision that allows the chosen pressure and steam in the boiler to be kept constant in all conditions of use.



PROGRAMMABLE CUP WARMER TEMPERATURE

Allows the cups to be kept at the optimum temperature in the most different climatic conditions.



ELECTRONIC AUTO-LEVEL

Through an electronic level probe the boiler is automatically filled and maintained to the right filling level.



LED LIGHTING OF THE WORK AREA

Allows efficient working in any condition of environmental lighting



AUTO-DIAGNOSIS, STATISTICAL DATA, SCHEDULED MAINTENANCE

Maintenance can be scheduled according to litres or number of coffees dispensed



AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION

Programmable on-off timer for each day and/or daily timetables.



AUTOMATIC CLEANING CYCLE Process for coffee

aroups cleanina.



BOILER WATER REGENERATION

Ensures resetting of the optimum chemical characteristics of the water and correct mineralisation



GROUP FLUSHING

With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean.

_Optional



FILTER HODERS





STEAMER TERMINAL (bigger holes diameter)

VOLUMETRIC





ENHANCED RESISTANCE

✓ Transparent side and back panels


Available in 2 finishes: black and steel, both available with some components* in black or red.


* rings, bolts, feet, boiler insulation







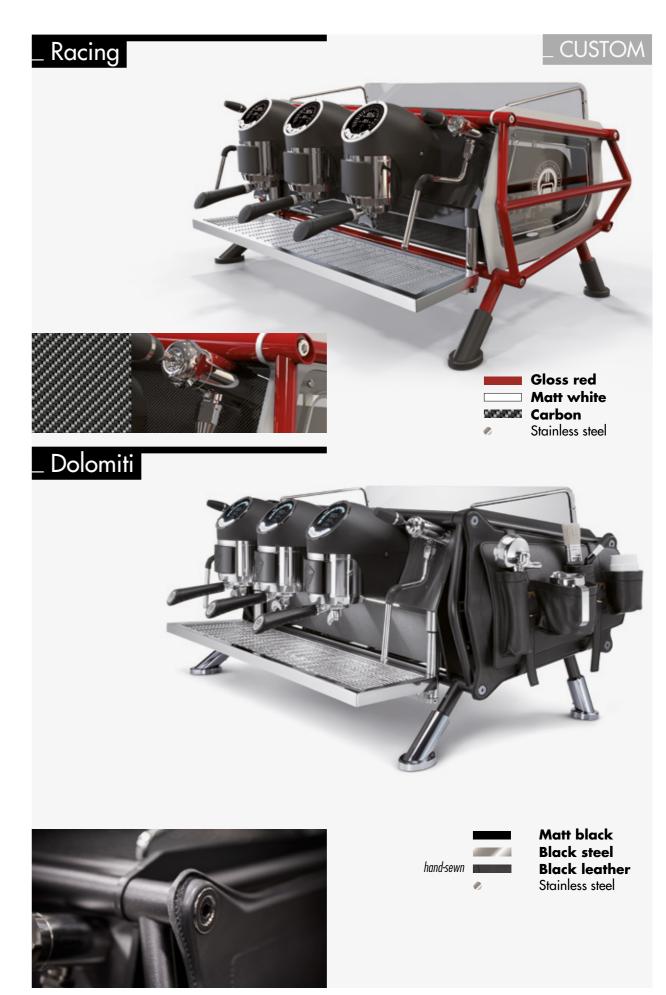

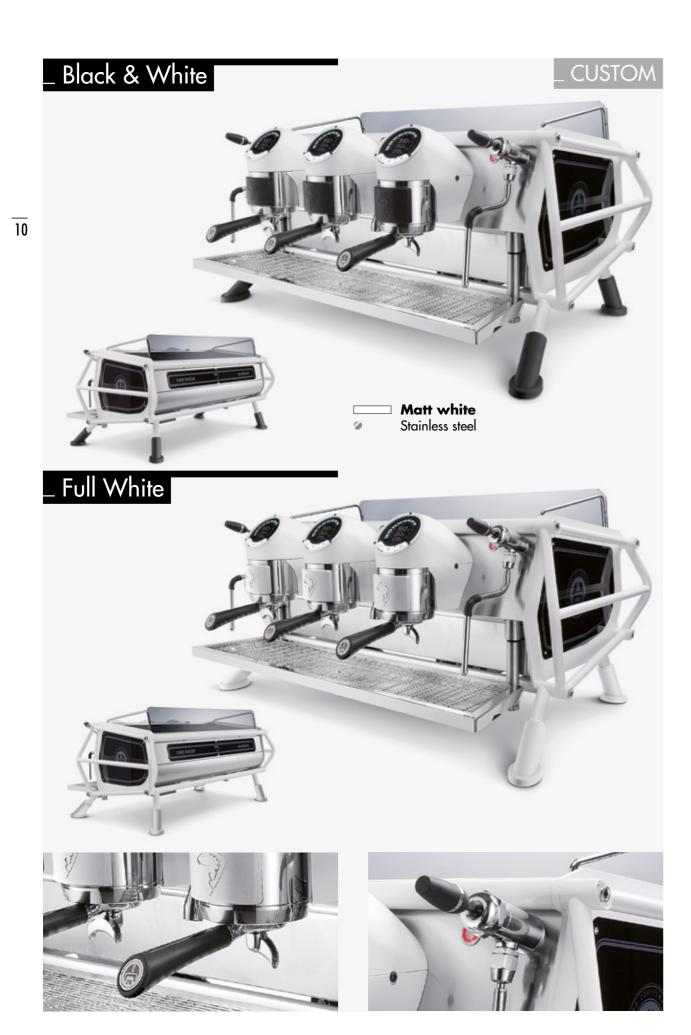



_Notes		5 - -
_		

For more information about our coffee machines please contact us export@sanremomachines.com









SAMREMO

Sanremo Coffee Machines s.r.l. Via Giacomo Bortolan 52, 31050 Vascon di Carbonera [TV] — ITALY T +39 0422 448900

www.sanremomachines.com

Sanremo UK, LTD 6/7 Thurloe Pl, South Kensington, London SW7 2RX — UK enquiries@sanremouk.com

www.sanremomachines.com

Sanremo Coffee Machines USA, Inc 99 Grand Street, Unit 20, Moonachie, New Jersey 07074 – USA T +1 973 907 3013 alessio.t@sanremous.com www.sanremomachines.com

Sanremo Coffee Machines s.r.l. has a certified Quality Management System according to UNI EN ISO 9001:2015 standard.